

- Very thin wall
- Flexible and Flame Retardant
- U/L and CSA

Thin Wall Heat Shrinkable Polyolefin Tubing


Product Number **BD317T**

BD317T is a very thin wall heat shrinkable Polyolefin Tubing with a highly flexible, radiation cross-linked tubing used for insulating, jacketing and identification where saving space is important.

Made from flame-retardant polyolefin, it has excellent electrical, chemical and physical properties representing a good all purpose heat shrinkable tubing.

Low shrink temperature reduces install time. Application of heat above 100°C will shrink this tubing quickly to 50% of its supplied diameter or snug down on the object it is to cover.

Resists a wide range of chemicals and oils, as well as sunlight, moisture and fungus.

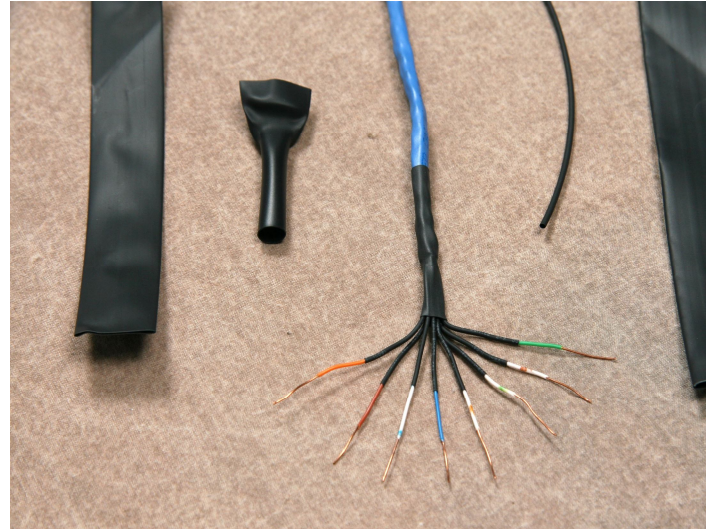

Low shrink temperature and space saving

Specifications:

Order Size	Expanded Diameter	Recovered Diameter	Recovered Wall
3/64"	.046"	.023"	.018"
1/16"	.063"	.031"	.018"
3/32"	.093"	.046"	.020"
1/8"	.125"	.062"	.020"
3/16"	.187"	.093"	.020"
1/4"	.250"	.125"	.025"
3/8"	.375"	.187"	.025"
1/2"	.500"	.250"	.025"
5/8"	.625"	.313"	.025"
3/4"	.750"	.375"	.030"
1"	1.000"	.500"	.035"
1-1/4"	1.250"	.625"	.040"
1-1/2"	1.500"	.750"	.040"
2"	2.000"	1.000"	.045"
3"	3.000"	1.500"	.050"
4"	4.000"	2.000"	.055"

U/L Subject224	VW-1
CSA, OFT	
AMS 3636	
ASTM 3637	
<hr/>	
Longitudinal Shrinkage: less than 5%	
Storage: very stable; can be stored over extended intervals without change.	
Temperature Rating: continuous operation from -55°C to 135°C.	
Electrical: 1300 volts per mil.	
Standard Colors: black, white, clear, red, blue and yellow (most sizes in brown, orange, green, violet and gray)	

